



Made in China

HTTP://WWW.SMSL-AUDIO.COM



用户手册 Manual

尊敬的客户:

非常感谢您选择深圳市双木三林电子有限公司的V2解码功率放大器。V2内置USB解码、耳机功率放大器于一体(简称解码功率放大器)。V2采用了先进的设计及高级的发烧材料精制而成。精良的做工,时尚的外观,简捷的操作,完美的音质。将给你带来高贵的视觉、听觉感受。

关于本手册:

本手册中的说明适用于V2解码功率放大器。请阅读本手册后再使用机器。


注意事项

☆使用耳机可能听不清楚外界环境的声音,为了您的人身安全,请不要在危险的环境中使用耳机。

☆为了保护您的听力,请在最小音量的状态下插入耳机,音量控制在舒适的情况下使用该机器。

1

部件介绍:

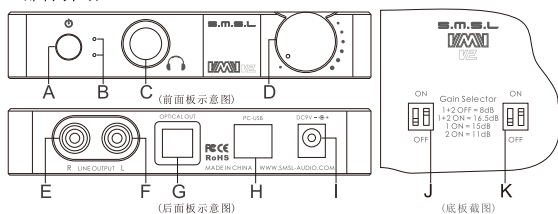

A:电源开关
 ● 电源开关按下为开机;
 ● 电源开关凸起为关机;
 B:电源指示灯显示
 C:耳机输出接口
 输入耳机可以欣赏音乐,使用耳机时建议:
 在最小音量的状态下插入耳机。
 D:音量控制旋钮
 ⌚ 顺时针旋转为音量加大;
 ⌚ 逆时针旋转为音量减小
 E:模拟右声道输出端口
 F:模拟左声道输出端口
 G:光纤输出端口(支持192KHz)
 H:电脑USB输入端口
 I:直流电源输入端口(DC9V)

J:右声道增益开关
 K:左声道增益开关
 左右声道增益开关各有4档:
 其中1和2关(OFF)增益为8dB;
 1和2开(ON)增益为16.5dB;
 1开(OFF)2关(OFF)增益为15dB;
 1关(OFF)2开(ON)增益为11dB。
 为了达到最佳的欣赏效果,请保持左、右声道的增益参数一致。

2

警告

为了减少发生火灾或触电的危险,请勿让本装置淋湿或受潮。不要把机器安装在诸如书橱或壁橱等狭隘不通风的地方。为了防火灾,请勿让报纸,桌布,窗帘等盖住装置的通风孔。也不可在装置上点放蜡烛和蚊香。

为了防火灾或触电危险,不可在装置上摆饰花瓶等满装液体的物体。

安装本系统,以便发生故障时可以立即将交流电源线从墙壁插座上拔除。

请勿让电池过度受热,如受到阳光直射或接触到火等。

有触电危险严禁拆开。

内部没有维修配件,维修请咨询具备资格人士。

为防止触电严禁拆开机壳,维修请咨询具备资格人士。

仅限室内使用。

3

规格指标:

输出电平: 2 Vrms;

耳放输出功率:

32Ω 500mW@THD=0.01%;

64Ω 500mW@THD=0.006%;

150Ω 123mW@THD=0.003%;

300Ω 133mW@THD=0.003%;

THD+N: <0.003%;

动态范围: >108dB;

信噪比: >105dB;

通道分离度: >105dB;

整机功耗: <3W;

USB输入: (异步)16bit-32bit 32kHz-384kHz;

光纤输出: 24bit/192kHz;

USB支持: Windows, Mac OS, iOS, Android;

产品特点:

超低时钟抖动;

采用美国ESS公司的高级DAC芯片ES9023;

USB采用32bit/384kHz异步传输芯片CM6631A;

带高功率高保真耳机放大器;

4

保修条款

一、服务期限:

深圳市双木三林电子有限公司承诺产品的美好品质,产品自售出之日7天内正常使用情况下出现故障,客户可以选择退货或者保修(不影响二次销售才可以退货)。正常使用一年内出现故障可以免费保修。

二、购买日期以销售商开出的购机发票或收据日期为准,网购可以以交易截图为准。

三、有以下情况都不能享受“三包”服务:

- 1.一切人为因素损坏,包括非正常工作环境下使用或不按照说明书使用;
- 2.用户私自拆机、改装、维修;
- 3.使用非指定或许可的配件造成损坏的;
- 4.机身的QC或保修贴损毁;
- 5.不能出示有效购机凭证;
- 6.不属于本公司产品;

四、保修方式为送修。

此条款仅适用于中国大陆,其他地区请参考当地销售代理商的规定和国家法规。

5

Dear users:

Thank you for choosing Shenzhen ShuangMuSanLin Electronic Co., Ltd. V2 decoder amplifier. V2 decoder built-in USB, headphone amplifier in one (referred to decode PA). V2 uses an advanced design and superior materials from refined fever. Excellent workmanship, stylish appearance, simple operation, perfect sound quality. Will bring you a noble vision, auditory perception.

About the manual:

The instructions in this manual applies to V2 Decoding PA. Please read this manual before using the product.


Attention

Use headphones may not hear the sound of the external environment, for your personal safety, please do not use the headset in a hazardous environment.

To protect your hearing, please insert in the state minimum volume of headphones, volume control using the machine in a comfortable situation.

6

Function:

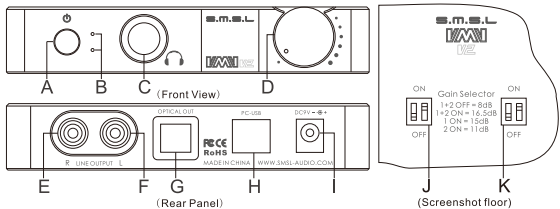

A:Power switch
 ⏻ Press the power switch is turned on
 ⏻ Raised to the power switch off
 B:Power indicator lights
 C:Headset output interface
 Plug in your headphones to listen to music.
 When using a headset is recommended:
 Insert the headset in the state of minimum volume.
 D:The Volume control buttons
 ⌚ Clockwise to increase the volume;
 ⌚ Anti-clockwise to decrease the volume;
 E: Right channel analog outputs
 F: Left channel analog outputs

G: Optical output port (supports 192KHz)
 H: Computer USB input port
 I: DC power input port (DC9V)
 J: Right channel gain switch
 K: Left channel gain switch
 Gain switch left and right channels have four files:
 Gain switches 1 and 2 is off, the gain is 8dB;
 Gain switches 1 and 2 is on, the gain is 16.5dB;
 Gain switch 1 ON, 2 OFF state, the gain is 15dB;
 Gain switch 1 off, 2 open state, the gain is 11dB.
 In order to achieve the best appreciate the effect, keep the left and right channel gain parameters in the same position.

7

Warning:

To reduce the risk of fire or electric shock, do not expose the unit to get wet or damp. Do not install the machine, such as a bookcase or closet narrow unventilated areas. To prevent fire, do not let the vents newspapers, tablecloths, curtains, etc. to cover the device. And do not place lighted candles on the apparatus and mosquito coils.

To prevent fire or shock hazard, not on the device, filled objects such as vases liquid. Install this system so that you can immediately unplug the AC power cord from the wall outlet when a failure occurs. Risk of electric shock Do not disassemble. No internal repair parts, please consult a qualified repair person. To prevent electric shock Do not disassemble the case, please consult a qualified repair person. Indoor use only.

8

Specifications indicators:

Output level: 2 Vrms

Amp output power: 32Ω 500mW@THD=0.01%;

64Ω 500mW@THD=0.006%;

150Ω 123mW@THD=0.003%;

300Ω 133mW@THD=0.003%;

THD+N: <0.003%;

Dynamic Range: >108dB;

SNR: >105dB;

Channel separation: >105dB;

Power consumption: <3W;

USB Input: (Asynchronous) 16bit-32bit;32kHz-384kHz;

Optical output: 24bit/192kHz;

USB support: Windows, Mac OS, iOS, Android;

Features:

Ultra-low jitter clock;

By the United States ESS's advanced DAC chip ES9023;

USB uses 32bit / 384kHz Asynchronous Transfer chip

CM6631A;

With a high-power high-fidelity headphone amplifier;

9

Warranty terms

1. The term of service

Shenzhen Shuangmu Sanlin Electronics Co.,LTD. promise good quality products, failure product from the date of sale under normal use within 7 days, the customer can choose to return or warranty (does not affect the secondary sales before they can return). Faulty for free within one year warranty normal use.

2. Date of purchase to the seller out of the purchase date of the invoice or receipt, online shopping can trade shots prevail.

3. Third, there is the following situation can not enjoy the "Three Guarantees" service:

- a. All damage to human factors, including the use of or not in accordance with the instructions to use the non-normal working environment.
- b. User privately disassemble, modification, maintenance;
- c. Use non-designated or approved accessories cause damage;
- d. fuselage QC or warranty stickers damage;
- e. can not produce a valid certificate purchase;
- f. Does not belong to the company's products.

4. How to warranty

This provision applies only to China, other countries in the region refer to the regulations of the local sales agents and national regulations.

10