

S.M.S.L



PL200

使用说明书/USER MANUAL/取扱説明書

本说明书的内容可能会随版本更改如有变动, 恕不另行通知

The contents of this manual may be changed with the edition, and are subject to change without notice.

本説明書の記載内容は、予告なく変更されることがありますので、あらかじめご了承ください。

Ver 1.0

安全注意事项

- 请将本音响系统安装在通风良好、阴凉、干燥、干净的位置，远离直射阳光热源、振动、灰尘、潮湿或寒冷。
- 只能使用本机指定的电压。使用高于指定数值的电压很危险，而且可能导致火灾，损坏本机或造成人身伤害。对于使用高于指定电压造成的任何损害，我司将不负任何责任。
- 不要试图自行改造或修理本机。如果需要任何服务，请与销售或者我司客服人员联系。不管有任何理由，都没有打开机壳的必要。
- 如果打算长时间不使用本机（比如度假时），请从墙壁交流电源插座上断开电源线的连接。

重要提示：

本说明书所提到的产品规格和资讯仅供参考。如有内容更新，恕不另行通知。

保修条款

一、服务期限

佛山双木三林科技有限公司承诺产品的良好品质，产品自售出之后7天内正常使用情况下出现故障，客户可以选择退货或者保修（不影响二次销售才可退货）。正常使用一年内出现故障可以免费保修。

二、购买日期以销售商开出的购机发票或收据日期为准，网购可以交易截图为准。

三、有以下情况都不能享受“三包”服务

1. 一切人为因素损坏，包括非正常工作环境下使用或不按照说明书使用。
2. 用户私自拆机、改装、维修。
3. 使用非指定或许可的配件造成损坏的。
4. 机身的QC或保修贴损毁。
5. 不能出示有效购机凭证。
6. 不属于本公司产品。

四、保修方式为送修

此条款只适于中国大陆，其它地区请参考当地销售代理商的规定和国家法规。



特点

- 内置两颗CS43131解码芯片，把CD的最大潜能发挥出来；
- 具备光纤和同轴数字输出，可连接支持数字信号解码器的音频设备；
- 具备3.5mm、4.4mm平衡耳机输出；
- 抓轨翻录，支持把音乐翻录至U盘；
- 支持播放DSD格式的CD光盘；
- 支持U盘播放和U盘保存歌曲；
- 支持多种音乐格式DSD64 (DFF/DSF) WAV/FLAC/APE/WMA/MP3等；
- 双向蓝牙5.3，支持蓝牙发射和蓝牙接收模式，兼容大部分蓝牙设备。
- 高品质CNC全铝合金外壳，支持高品质镀金输入输出连接端子；
- 配备全功能遥控器。



PL20包装清单

- 1 x SMSL PL20
- 1 x 电源线
- 1 x 遥控器
- 1 x 说明书
- 1 x 保修卡



技术参数

输入方式		CD、U盘、蓝牙	
输出方式		线路输出 / 3.5mm、4.4mm耳机 / 光纤 / 同轴/蓝牙	
U盘格式		FAT32、exFAT、NTFS(仅读)	
CD类型		CD-DA/CD-ROM/CD-R/CD-RW/CD-DSD/MP3	
耳机输出功率	32Ω	4.4mm	160mW
		3.5mm	40mW
THD+N		0.0012%	
信噪比		98dB	
消耗功率		<3.5W	
待机功耗		<0.1W	
体积		166.3x49.5x209.3mm(WxHxD)	
重量		1.39kg/3.06lbs	

SMSL保留在不另行通知的情况下进行可能导致规格或特性更改的改进的权利。


关于遥控器

- 如果遥控器距离本机很近时操作仍无效，请用新电池更换。
- 如果要长时间不使用遥控器，请取出遥控器的电池。
- 按照电池处置的地方性法规处置废旧电池。

遥控器的使用


注意

遥控器请使用2节7号(AAA)电池

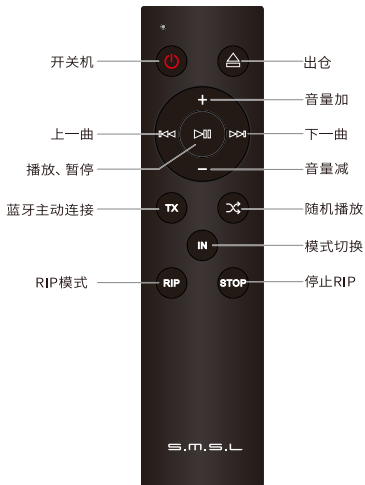



部件介绍

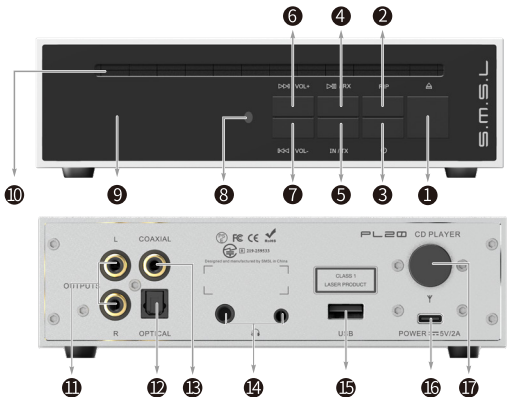

- 1** 进出仓键
- 2** 短按停止RIP、长按进入RIP复制光盘模式
- 3** 短按开关机
- 4** 短按暂停播放、长按蓝牙可被发现
- 5** 短按模式切换、CD->USB->BT接收、长按主动发射
- 6** 短按下一曲、长按增加音量
- 7** 短按上一曲、长按减小音量
- 8** 红外接收窗
- 9** 显示屏
- 10** CD入口 (*不支持8cm碟片)
- 11** 单端线路输出
- 12** 光纤输出
- 13** 同轴输出
- 14** 3.5mm、4.4mm耳机接口
- 15** U盘接口
- 16** 电源接口 (TYPE-C 5V/2A)
- 17** 蓝牙



功能介绍

■ CD播放

- 支持 ϕ 12CM的CD光盘。
- 支持格式:CD-DA/CD-ROM/CD-R/CD-RW/MP3
- 支持播放DSD格式的CD光盘!

■ U盘播放

- 支持多种音乐格式:DSD64 (DFF/DSF) WAV/FLAC/APE/WMA/MP3等。

■ 抓轨翻录

- 长按【**RIP**】两秒或遥控器按RIP键进入CD抓轨复制模式,显示屏显示复制进度条88%,自动将CD光盘音乐的音轨抓取为WAV无损文件以及原始的数位编码并保存到U盘中,保证CD音轨完整性,采用最佳的低倍数提取,一张CD光盘大约复制/翻录时间10-15分钟(根据CD光盘容量大小决定翻录时间,NTFS磁盘格式不支持抓轨)。
- 保存原始CD音乐音轨状态,可通过手机或电脑编辑歌曲名字,也可通过本地导入网络播放器自动匹配ID3信息。

■ 双向蓝牙5.3, 三种匹配模式:

- 蓝牙接收:通过手机搜索蓝牙名称“CD player”连接匹配,进入该功能时蓝牙发射自动退出断开。

- 蓝牙发射: 长按切换键 **【IN / TX】** 2秒或遥控器 **TX** 键进入蓝牙发射配对模式, 自动搜索周边最强信号的蓝牙设备, 同时需要蓝牙设备进入配对模式, 配对过程大概10-20秒, 产品只能配对一台设备, 如果30秒没有配对成功, 请检查有没有连接到其他蓝牙设备或重复操作一次。兼容大部分蓝牙音箱、蓝牙耳机、蓝牙解码器。
- 随机播放模式: 遥控器  键进入随机播放模式。

■ 如何断开蓝牙

- 按 **【IN / TX】** 功能切换键到蓝牙模式时之前连接的蓝牙自动断开, 如需重新连接再搜索配对。

■ 本机的两种方式播放DSD

- 使用U盘装载DSF, DFF格式的音频文件, 切换到USB输入进行播放;
- 把DSD文件刻录到CD数据光盘中, 再把CD放入本机播放, 注意, 仅支持CD, 不支持DVD数据光盘。



输出功能介绍

模拟输出, 3.5mm、4.4mm耳机 (AUX) 和蓝牙同频输出, 无需选择输出模式

■ 3.5mm、4.4mm耳机输出

- 用于有线耳机

■ 光纤/同轴输出

- 用于支持数字信号解码的音频设备, 如电视条形音箱、DAC音频解码器、数字播放器、汽车DSP数字功放等。

■ 线路输出

- 用于连接功放或有源音箱。

■ 蓝牙发射

- 采用最新5.3蓝牙版本, 自动发射匹配蓝牙音箱设备。

■ U盘口

- 最高支持歌曲采样率:24bit/96kHz
- 可读取U盘资料的同时也是CD光盘复制/抓轨/翻录存储的路径。



使用步骤

■ 连接电源

- 使用提供的电源线连接至DC 5V电源适配器/便携式充电宝/设备USB口。

■ 放置碟片

- 将CD光盘放入本产品。

■ 选择功能

- CD播放:放入CD光盘后自动播放。
- 抓轨翻录:插入U盘,自动抓取CD音轨并保存文件,只可全部CD音轨一起复制,不可选择单个音轨复制。
- U盘播放:播放U盘音频文件。
- 蓝牙接收:通过遥控器或面板按键切换蓝牙模式,连接手机或其他移动设备(进入蓝牙接收模式时,蓝牙发射将自动断开,如需再次连接请切换到CD或USB模式时再发射配对)。

■ 输出连接

- 3.5mm、4.4mm输出:连接耳机
- 光纤输出:连接带光纤信号输入的音频解码播放器。
- 线路输出:连接功放或有源音箱。
- 同轴输出:连接带同轴信号输入的音频解码播放器。

■ 遥控器操作

- 使用遥控器进行播放、暂停、切换曲目等操作。



Safety Notes

- Install this unit in a well ventilated, cool, dry, clean place-away from direct sunlight, heat sources, vibration, dust, moisture, or cold.
- Use the voltage specified on this unit Only. Using this unit with a higher voltage than specified is dangerous and may cause fire , damage to this unit, or personal injury. Our company will not be held responsible for any damage resulting from the use of this unit with a voltage other than that specified.
- Do not attempt to modify or fix this unit by yourself. Contact a person or customer service when any service is needed. The cabinet should never be opened for any reason.
- When not planning to use this unit for long periods of time (i.e. when going on vacation), disconnect the power cable from the AC wall outlet.

Important note:

The product specifications and information mentioned in this manual are for reference only. The content of this manual is subject to change without notice.



Warranty Terms

1.The Term of Service

Foshan Shuangmusanlin Technology Co., Ltd promises to offer good-quality products. If the product is broken in 7 days after purchasing when you use it normally, you can choose to send it back for return, replacement or repairing (only the product does not affect the second sales can be returned). Repairing for free in one year if you use it normally.

2.Date of purchase is in accordance with the date on invoice or receipt used by seller, and if you buy it on line, you can show the screenshot of trade.

3.If an inappropriate usage causes the unit damaged, the warranty will be void. As below.

- All damages by inappropriate use, including using it under non-normal working environment or without following the instructions.
- Dismantling, refitting, repairing by user in private.
- Causing damage by using some fittings instead of the designative or accredited ones.
- Cannot provide credible proof of purchase.

4.Sending it back to our company for repairing.

5.Contact your S.M.S.L Audio reseller for a return or replacement.



Features

- Built-in two CS43131 decoding chips to maximize the performance of CD;
- With optical and coaxial digital output, it can be connected to external DAC or digital power amplifier;
- With 3.5mm and 4.4mm balanced headphone output;
- Support for ripping, support for ripping music to a USB flash drive;
- Supports playback of DSD format discs;
- Support USB flash drive playback;
- Support a variety of music formats DSD64 (DFF/DSF) WAV/FLAC/APE/WMA/MP3, etc.
- Bidirectional Bluetooth 5.3, supports Bluetooth transmitting and receiving modes, and is compatible with most Bluetooth devices.
- High-quality CNC all-aluminum shell, supporting high-quality gold-plated input and output connection terminals;
- Equipped with a full-function remote control.



Packing list

- | | | |
|---------------------|-------------------|----------------------|
| • 1 x SMSL PL20 | • 1 x USB cable | • 1 x Remote control |
| • 1 x Warranty card | • 1 x User manual | |



Specifications

Input		CD/USB drive/Bluetooth	
Output		RCA/3.5 mm or 4.4mmheadphone/Optical/Coaxial/Bluetooth	
U disk formats		FAT32, exFAT, NTFS (read-only)	
CD TYPE		CD-DA/CD-ROM/CD-R/CD-RW/CD-DSD/MP3	
Headphone output power	32Ω	4.4mm	160mW
		3.5mm	40mW
THD+N		0.0012%	
SNR		98dB	
Power consumption		<3.5W	
Standby power		<0.1W	
Size		166.3x49.5x209.3mm(WxHxD)	
Weight		1.39kg/3.06lbs	

SMSL reserves the right to make improvements which may result in specification or feature changes without notice.


Remote control

- If the remote control is still ineffective when it is close to the unit, replace it with a new battery.
- If the user does not use the remote control for a long time, remove the battery of the remote control.
- Dispose of used batteries in accordance with local regulations on battery disposal.

Operating the remote control


Note

This remote controller use
2 x R03/AAA batteries.

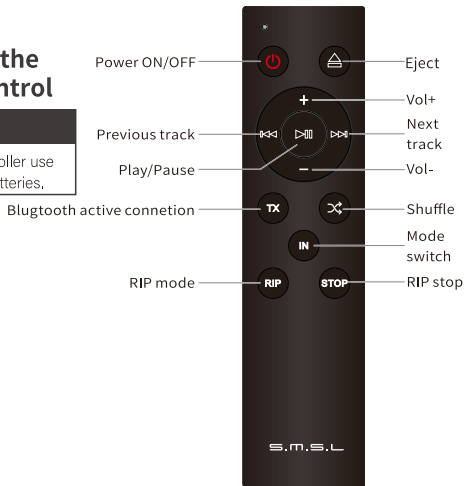



Display Interface and Instructions

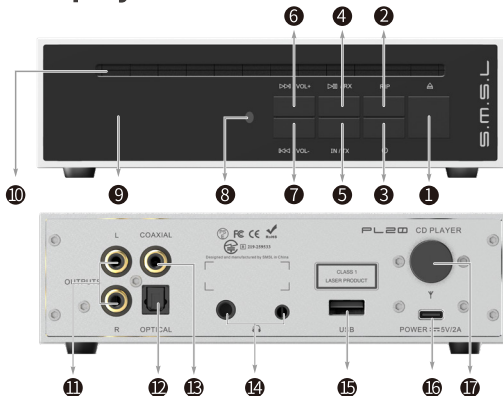

- 1** Eject/Load Button
- 2** Short press to stop RIP,
Long press to enter RiP CD-copy mode
- 3** Short press to power on/off
- 4** Short press to pause,
Long press to make Bluetooth discoverable
- 5** Short press to switch modes: CD-USB-Bluetooth Receiver,
Long press for active transmission
- 6** Short press for next track,
Long press to increase volume
- 7** Short press for previous track,
Long press to decrease volume
- 8** Infrared receiver window
- 9** Display screen
- 10** CD slot (8 cm discs not supported)
- 11** RCA output
- 12** Optical output
- 13** Coaxial output
- 14** 3.5 mm & 4.4 mm headphone jacks
- 15** U-disk interface
- 16** Power input (USB-C 5V/2A)
- 17** Bluetooth



Function Introduction

■ CD PLAYBACK

- Supports 12 cm CD discs.
- Supported formats: CD-DA, CD-ROM, CD-R, CD-RW, MP3.
- Supports playback of DSD format discs.

■ USB FLASH DRIVE PLAYBACK

- Supports multiple audio formats: DSD64 (DFF/DSF), WAV, FLAC, APE, WMA, MP3, etc.

■ CD RIPPING

- Long-press the **[RIP]** key for two seconds, or press the RIP button on the remote, to enter CD-ripping mode.
Long press the [RIP] button for two seconds or press the RIP button on the remote control to enter CD ripping mode. The display shows the ripping progress of 88%. It automatically rips the CD's audio tracks into lossless WAV files and the original digitally encoded and saves them to a USB flash drive, ensuring the integrity of the CD's audio tracks. It uses the optimal low-speed extraction. The ripping/copying time for one CD is approximately 10-15 minutes (depending on the CD's capacity, The NTFS disk format does not support track grabbing).
- It preserves the original CD music track status, and allows you to edit song names via mobile phone or computer, or automatically match ID3 information by importing from a local network player.

■ BIDIRECTIONAL BLUETOOTH 5.3, THREE PAIRING MODES

- Bluetooth reception: Connect and pair via Bluetooth name "CD player" on your phone. Bluetooth transmission will automatically exit and disconnect when this function is activated.

- Bluetooth-transmit mode: Long press the [IN/TX] button for 2 seconds or press the TX button on the remote control to enter Bluetooth transmission and pairing mode. It will automatically search for the strongest nearby Bluetooth device, make sure the Bluetooth device is also in pairing mode, the pairing process takes approximately 10-20 seconds. The product can only pair with one device at a time. If pairing fails after 30 seconds, please check if it is connected to another Bluetooth device or repeat the process. Compatible with most Bluetooth speakers, Bluetooth headphones, and Bluetooth decoders.
- Shuffle mode: Press the  button on the remote control to enter shuffle playback mode

■ HOW TO DISCONNECT BLUETOOTH:

- When pressing the [IN/TX] function switch key to switch to Bluetooth mode, the previously connected Bluetooth device will automatically disconnect. To reconnect, search for and pair again.

■ THERE IS TWO WAYS TO PLAY DSD

- Use USB to load DSF and DFF format audio files, switch to USB input for playback;
- Burn the DSD file to a CD disc, and then insert the CD into PL20 for playback. Note that only CDs are supported, DVD data discs are not supported.



Output Functions Introduction

Analog output, 3.5mm & 4.4mm headphone (AUX) and Bluetooth output at the same frequency, no need to select output mode.

■ 3.5mm/4.4mm output

- For wired earphones/headphones

■ OPTICAL / COAXIAL DIGITAL OUTPUT

- For audio devices that support digital signal decoding, such as TV soundbars, DAC, digital players, and car DSP digital amplifiers, etc.

■ LINE OUTPUT

- Connecting to amplifiers or active speakers

■ BLUETOOTH TRANSMISSION

- Adopting the latest 5.3 Bluetooth version, automatically transmits to pair with Bluetooth speaker devices.

■ U-DISK PORT

- Maximum supported sampling: 24bit/96kHz
- Reads data from a USB flash drive and also serve as a path for copying/ripping/duplicating CDs.



Usage Steps

■ CONNECT THE POWER SUPPLY

- Use the supplied cable to connect to a DC 5V adapter, power bank, or any USB-A port on another device

■ INSERT THE DISC

- Place the CD into the unit.

■ SELECT THE DESIRED FUNCTION

- CD playback: disc starts automatically once loaded.
- Rip/Extract: insert a USB flash drive; the unit automatically grabs every CD track and saves it as a file. Only full-disc ripping is possible—individual track selection is not supported.
- USB playback: plays audio files from the USB flash drive.
- Bluetooth-receive mode: switch to it via the remote or panel keys, then pair with a phone or other mobile device. (When this mode is entered, Bluetooth-transmit is automatically cut; to re-transmit, first switch back to CD or USB mode and pair again.)

■ OUTPUT CONNECTIONS

- 3.5mm, 4.4mm output: connected to headphone
- Optical output: connect to an audio decoder or player with optical input.
- Line output: connect to an amplifier or powered speakers.
- Coaxial output: connect to an audio decoder or player with coaxial input.

■ REMOTE-CONTROL OPERATION

- Use the remote to play, pause, skip tracks, etc.

安全指示

- 商品は、風通しがよく、涼しく、乾燥した清潔な場所で、直射日光や熱源から離れた場所に設置してください。直射日光、熱源、振動、ほこり、湿気、寒さを避けてください。
- 本機に指定されている電圧のみを使用してください。規定以上の電圧を使用することは危険であり、火災や本機の破損の原因となります。規定以上の電圧を使用したことによる損害については、一切の責任を負いません。
- ご自分で本機を改造したり修理したりしないでください。サービスが必要な場合は、セラ-または当社のカスタマ-サービスにご連絡ください。
- 長期間ご使用にならない場合(休暇中など)は、電源コードをコンセントから抜いてください。

重要なお知らせ：

このパンフレットに記載されている製品の仕様や情報は、あくまで参考情報です。内容は予告なく更新されることがあります。

保証条件

一、サービス期間

S.M.S.L社は、製品の品質の良さを追求しています。通常の使用状態で販売日から7日以内に製品が故障した場合、お客様は返品または保証期間内の無料修理を選択することができます(二次販売に影響しない場合に限り返品可能)。正常な使用状態で1年以内に故障した場合は、無料修理対応いたします。

二、購入日は販売者が発行した購入請求書または領収書の日付が対象となり、オンライン購入の場合は取引画面のスクリーンショットが対象となります。

三、以下の場合、「返品/新品交換」のサービスの対象外となります。

- 1.通常の作業環境以外での使用や、指示に従わない場合など、人為的な要因で生じた損害。
- 2.ユーザーが個人的に本機を解体、改造、修理した場合。
- 3.指定外の付属品やライセンスされた付属品の使用によって生じた損害。
- 4.本体に貼られているQCシールや保証書シールが破損した場合。
- 5.有効な購入証明書の提示がない場合。
- 6.当社の製品に属さないもの。

四、保証方法は配送による

その他の地域については、お客様の販売代理店の規定および各国の規定をご参照ください。



製品の特徴

- 内蔵された2基のCS43131デコードチップにより、CDの最大限の潜在能力を引き出します。
- 光デジタル出力と同軸デジタル出力を備え、デジタル信号デコーダーをサポートするオーディオ機器に接続可能。
- 3.5mmおよび4.4mmバランス型ヘッドフォン出力を装備。
- リッピング機能により、音楽をUSBメモリに録音可能。
- DSD形式に対応したCDディスクの再生が可能です！
- USBメモリの再生および楽曲の保存に対応。
- DSD64（DFF/DSF）、WAV、FLAC、APE、WMA、MP3など、多様な音楽形式をサポート。
- 双方向Bluetooth 5.3、Bluetooth送信モードと受信モードをサポートし、ほとんどのBluetoothデバイスと互換性あり。
- 高品質なCNCフルアルミニウム合金筐体、高品質メッキ入出力端子を採用。
- 全機能リモコン付属。



PL20 付属品リスト

- SMSL PL20 本体
- 電源コード
- リモコン
- 取扱説明書
- 保証書



技術仕様

入力方式		CD、USBメモリ、Bluetooth	
出力方式		ラインアウト、3.5mm / 4.4mm ヘッドホン、光、同軸、ブルートゥース	
USBディスクのフォーマット形式		FAT32、exFAT、NTFS(読み取り専用)	
CDタイプ		CD-DA/CD-ROM/CD-R/CD-RW/CD-DSD/MP3	
ヘッドホン出力電力	32Ω	4.4mm	160mW
		3.5mm	40mW
THD+N		0.0012%	
SN比		98dB	
消費電力		<3.5W	
待機時消費電力		<0.1W	
外形寸法		166.3x49.5x209.3mm(WxHxD)	
Weight		1.39kg/3.06lbs	

SMSLは、予告なしに仕様や特性を変更する改良を行う権利を留保します。


リモコンについて

- リモコンが本機に近い場合でも操作が無効になる場合は、新しい電池に交換してください。
- リモコンを長期間使用しない場合は、電池を取り出してください。
- 使用済み電池の廃棄については、各地域の規制に従って処分してください。

リモコンの使用方法


注意

リモコンには、単4形（AAA）
乾電池を2本使用してください。

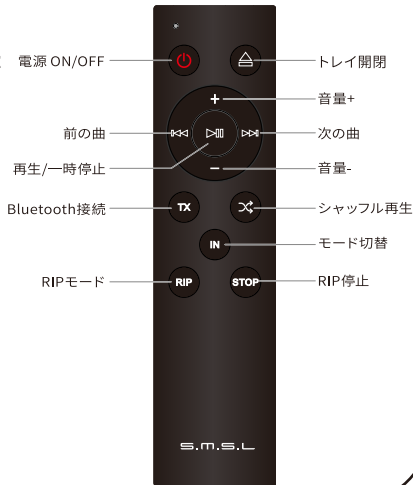



部品について

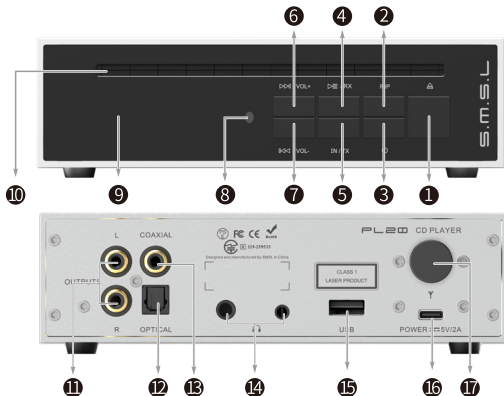

- | | |
|--|--|
| 1 トレイ開閉 | 2 短押し: RIP停止、長押し: RIP (CDコピー) モード |
| 3 短押し: 電源ON/OFF | 4 短押し: 再生/一時停止、長押し: Bluetooth検出可能状態 |
| 5 短押し: モード切替、CD→USB→BT受信、長押し: Bluetooth送信 | 6 短押し: 次の曲、長押し: 音量アップ |
| 7 短押し: 前の曲、長押し: 音量ダウン | 8 赤外線受信窗 |
| 9 ディスプレイ | 10 CD挿入口 |
| 11 非平衡ライン出力 | 12 光出力 |
| 13 同軸出力 | 14 3.5mm/4.4mm ヘッドホン端子 |
| 15 USBポート | 16 電源端子 (TYPE-C 5V/2A) |
| 17 Bluetooth | |



機能紹介

■ CD再生

- 12cmのCDディスクに対応。
- 対応フォーマット:CD-DA / CD-ROM / CD-R / CD-RW / MP3
- DSD形式に対応したCDディスクの再生が可能です！

■ USBメモリ再生

- 多様な音楽フォーマットに対応: DSD64 (DFF/DSF)、WAV、FLAC、APE、WMA、MP3など。

■ リッピング機能

- [RIP]ボタンを2秒間長押し、またはリモコンのRIPボタンを押すと、CDリッピング(コピー)モードに移行します。ディスプレイにコピー進捗(最大88%)が表示され、CDの音楽トラックを自動的にWAVロスレスファイルおよびオリジナルのデジタル符号化としてUSBメモリに抽出・保存し、CD音源の完全性を保証します。最適な低速抽出方式を採用。CD1枚のコピー/リッピングにかかる時間は約10～15分です(CDの容量により異なります、NTFSディスク形式ではリッピングはサポートされていません)。
- オリジナルのCD音楽トラックの状態を保存。スマートフォンまたはパソコンで曲名を編集可能、またはネットワークプレーヤーにローカルインポートしてID3情報の自動マッチングが可能です。

■ 双方向 BLUETOOTH 5.3 & 3つ接続モード

- Bluetooth受信: スマートフォンでBluetooth名「CD player」を検索して接続・ペアリング。この機能を使用時、Bluetooth送信機能は自動的に終了(切断)されます

- "Bluetooth送信: 送信モードでは、[IN/TX]キーを2秒間長押しするか、リモコンのTXボタンを押してBluetooth送信ペアリングモードに移行します。本機は自動的に周辺で最強の信号を持つBluetoothデバイスを検索します。同時に対応するBluetoothデバイスもペアリングモードに設定する必要があります。ペアリングプロセスは約10～20秒かかります。本機は1台のデバイスとのみペアリング可能です。30秒以内にペアリングが成功しない場合は、他のBluetoothデバイスに接続されていないか確認するか、操作を繰り返してください。ほとんどのBluetoothスピーカー・Bluetoothヘッドホン・Bluetoothデコードーと互換性があります。"
- シャッフル再生モード: リモコンの対応ボタン【】でシャッフル再生モードに入ります。

■ BLUETOOTH接続の切断方法

- [IN/TX]機能切替キーを操作してBluetoothモードに切り替えると、以前接続されていたBluetoothデバイスは自動的に切断されます。再接続する場合は、再度検索とペアリングを行ってください。

■ 本機でDSDを再生する2つ方法:

- USBにDSFまたはDFF形式のオーディオファイルを保存し、入力源をUSBに切り替えて再生する。
- DSDファイルをCDデータディスクに書き込み、当該CDを本機で再生する。※CDのみ対応、DVDデータディスクには非対応。



出力機能紹介

アナログ出力、3.5mm/4.4mmヘッドホン(AUX)とBluetoothが同時に出力可能。
出力モードを選択する必要はありません。

■ 3.5mm、4.4mmイヤホン出力:

- 有線イヤホン用

■ 光デジタル/同軸出力:

- サウンドバー、DACオーディオデコーダー、デジタルプレーヤー、カーDSPデジタルアンプなど、デジタル信号デコードをサポートするオーディオ機器に接続できます。

■ ライン出力:

- パワーアンプまたはアクティブスピーカーに接続するために使用します。

■ BLUETOOTH送信:

- 最新のBluetooth 5.3バージョンを採用し、Bluetoothスピーカーデバイスを自動的に検出して接続します。

■ USBポート

- 最高対応サンプリングレート:24bit/96kHz
- USBメモリからのデータ読み込みが可能であり、同時にCDのコピー/リッピング/録音保存の保存先としても機能します。

使用方法

■ 電源接続

- 付属の電源コードを使用し、DC 5V電源アダプター/モバイルバッテリー/機器のUSBポートに接続してください。

■ ディスク挿入

- CDディスクを本製品に入れてください。

■ 機能選択

- CD再生: CDディスクを入れると自動再生します。
- リッピング: USBメモリを挿入すると、自動的にCDトラックを抽出しファイルを保存します。CDトラック全体の一括コピーのみ可能で、単一トラックの選択コピーはできません。
- USBメモリ再生: USBメモリ内のオーディオファイルを再生します。
- Bluetooth受信: リモコンまたは本体ボタンでBluetoothモードに切り替え、スマートフォン或其他のモバイル機器と接続します (Bluetooth受信モードに入ると、Bluetooth送信は自動的に切断されます。再接続する場合は、CD或いはUSBモードに切り替えてから再度送信とペアリングを行ってください)。

■ 出力接続

- 3.5mm、4.4mm出力：ヘッドホンを接続する
- 光デジタル出力：光デジタル信号入力に対応したオーディオデコーダー／プレーヤーに接続します。
- ライン出力：パワーアンプまたはパワードスピーカーに接続します。
- 同軸出力：同軸信号入力に対応したオーディオデコーダー／プレーヤーに接続します。

■ リモコン操作

- リモコンを使用して、再生／一時停止、曲切り替えなどの操作を行います。

S.M.S.L